

**Installation Notes:**

- Do not overload Tripod
- Large tent pegs should be used to secure the Tripod to the ground (e.g. 12 x 300 long x Ø9 steel tent pegs)
- Secure Tripod BEFORE fixing items to Mast Tube
- Avoid use in high winds
- Tripod footprint: Ø1500



**Shaft Lock Pin:**

Tripod comes with 15 units


Foot Plate, Ø60 x 5mm with 3 x Ø10 peg holes

Flange Plate, Ø200 x 6mm with 3 x Ø10 peg holes

**TOP VIEW:**

**PACK-UP NOTES:**

- Undo bottom Shaft Lock Pin of Strut Support.
- Pivot Strut Supports upwards.
- Repeat for Legs and secure with Pin.
- Store Foot into Leg end then secure with Pin.
- Repeat for other Supports & Legs

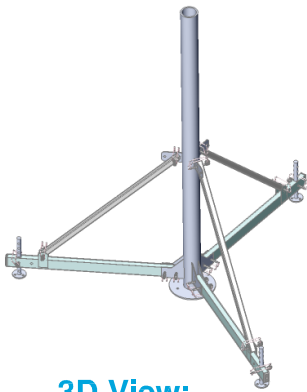

**3D View:**

Mast Tube, Ø76.2 x 6.35 w.t.

1500

Strut Support, RHS, 25 x 25 x 1.6 w.t.

Adjustable Foot, Rod, Ø19 x 200 with 7 x Ø10 levelling holes & 3 x Ø10 peg holes

Shaft Lock Pins

Leg, RHS, 50 x 25 x 2.5 w.t.

**SIDE VIEW:**

Strut Support

Packed Length: 1534

Foot

Leg

**PACKED TRIPOD:**

**A-1931-4  
COLLAPSIBLE TRIPOD,  
ALUMINIUM  
ASSEMBLY SKETCH**

