



AMFM INTER

6mm international female threaded receive whip
AM/FM radio receive 530-1600 kHz and 87.5-108 MHz



The AMFM INTER is an effective receive whip designed for receive purposes for both AM and FM Radio. The AMFM INTER comes standard a female 6mm international thread in the mount ferrule.

Mounting hardware, bird-proofing and other installation accessories are all available separately.

Construction	Black heatshrunk fibreglass and black powdercoated mount ferrule
Frequency range	AM radio 530-1600 kHz and FM radio 87.5-108 MHz
Gain	Receive only
Tuning	Factory
Maximum power	Receive only
Polarisation	Vertical
H Plane	360° omnidirectional ± 0.5 dBd - receive
Height	1.0m
Weight	86grams
Mount ferrule thread	6mm international female thread
Projected area	0.013m ²
Wind load at 160kph	0.015kN, 1.545kg
Mounting hardware order separate	Base: XB Base Cable base: XB-4.7 no connector or XB-4.7-TNC Magnetic base: MGB-XB
Mounting position recommended	Mount as high on your vehicle or structure as possible using an appropriate base and 16mm holed bracket or magnetic base.




6mm female thread

AMFM INTER

6mm international female threaded receive whip
AM/FM radio receive 530-1600 kHz and 87.5-108 MHz

Recommended mounting hardware

 <p>XB-4.7 - 6mm male threaded base with 4.7 metres MIL-SPEC RG58 cable, no connector supplied</p> <p>16mm mount hole</p> <p>Requires 15mm spanner</p>	 <p>MGB-XB - Magnetic base with 6mm male threaded base, 4.7 metres MIL-SPEC RG58 cable, no connector</p> <p>105mm diameter</p>
 <p>XB Base Assy - 6mm male threaded base, no cable</p> <p>16mm mount hole</p> <p>Requires 11mm spanner</p>	

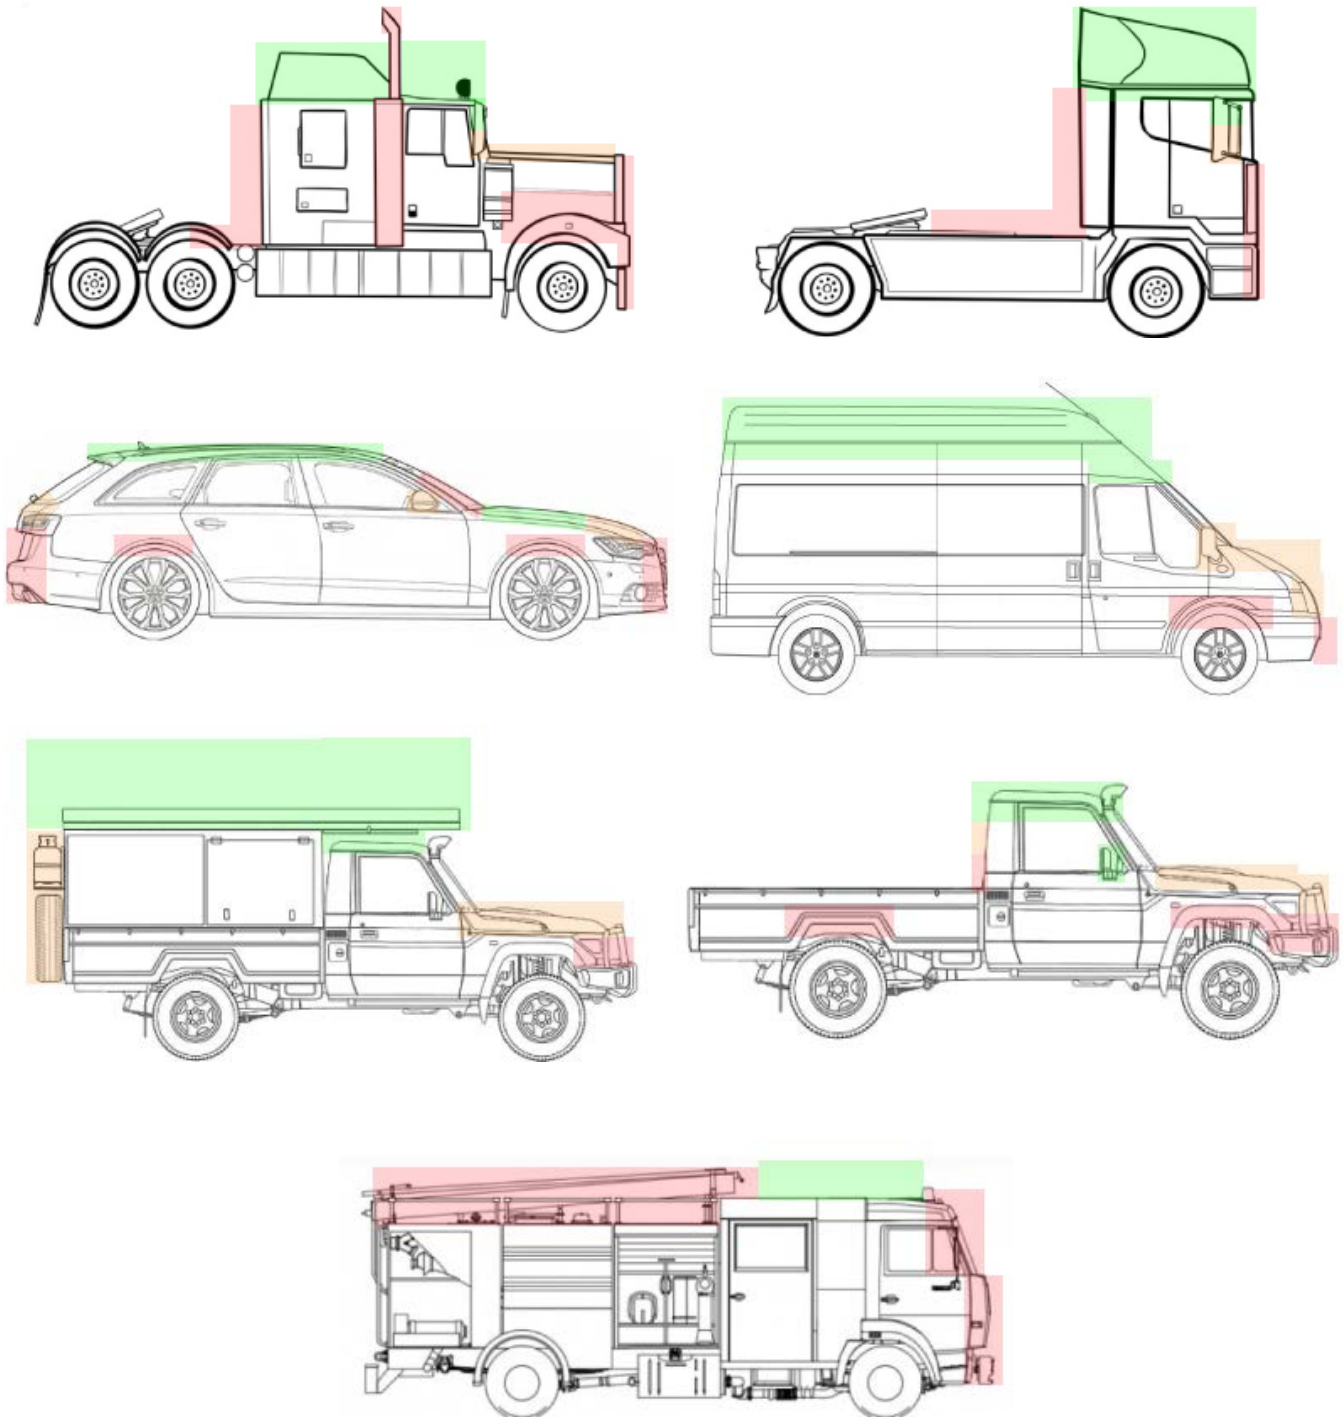
Additional installation accessories




 <p>BBM-SS - wrap around bull bar mount, up to 50mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>	 <p>BBML-SS - wrap around extra large bull bar mount, up to 65mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>
 <p>BBMXL-SS - wrap around extra large bull bar mount, up to 76mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>	 <p>BBKB-B - Knock-down antenna mount, powder coated black</p> <p>16mm mount hole with 5.5mm cable hole</p>
 <p>ATLM series - Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment</p> <p>16mm mount hole</p> <p>Black or Chrome</p> <p>Includes 5mm and 2mm allen keys</p>	

AMFM INTER

6mm international female threaded receive whip
AM/FM radio receive 530-1600 kHz and 87.5-108 MHz

Vehicle Mounting locations



 Best/Recommended location for mounting
 Suitable mounting locations
 Not suitable mounting locations