

## CR whip series

Medium to heavy-duty whips with cable bases

AM/FM radio receive 530-1600kHz and 87.5-108MHz

  
In-stock  
Ready to  
Ship

To improve AM and FM radio reception whilst travelling or in a fixed location, the CR range of fibreglass whips offer superb performance within a light weight yet robust design. Ideal for mounting in various positions on a vehicle, truck mirror or fixed location.

Mounting hardware, adaptors, connectors and other installation accessories are all available separately.

|                                  | CR36                                                                                                                                                              | CR66       | CR66-HD                                              |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------|
| Construction                     | Black heatshrink fibreglass whip, chrome ferrule, OB-2 base and cable                                                                                             |            | Heavy-duty whip, chrome ferrule, OB-2 base and cable |
| Frequency range                  | AM Radio 530-1600kHz and FM Radio 87.5-108MHz                                                                                                                     |            |                                                      |
| Tuning                           | Factory                                                                                                                                                           |            |                                                      |
| Cable                            | 4.0 metres RG58 MIL-SPEC - bottom exits from OB-2 base                                                                                                            |            |                                                      |
| Connector                        | Male car radio connector fitted to cable                                                                                                                          |            |                                                      |
| Gain                             | Receive only                                                                                                                                                      |            |                                                      |
| Impedance                        | 50 Ohms                                                                                                                                                           |            |                                                      |
| Polarisation                     | Vertical                                                                                                                                                          |            |                                                      |
| H Plane                          | 360° omni-directional                                                                                                                                             |            |                                                      |
| Height                           | 1.0 metre                                                                                                                                                         | 1.5 metres | 1.83 metres                                          |
| Weight                           | 310grams                                                                                                                                                          | 350grams   | 500grams                                             |
| Cable assembly                   | CRBL - 4.7m cable with male car radio connector fitted                                                                                                            |            |                                                      |
| Whip part number                 | CR36-TPM                                                                                                                                                          | CR66-TPM   | CR66-HD-TPM                                          |
| Mounting hardware order separate | Bullbar: BBM-SS, BBML-SS, BBMXL-SS or BBKB-B<br>Truck Mirror: MRM-SS<br>Bracket Mounting: GM1, GM2, GM4, GM6<br>Spring base: MS Base for between whip and OB base |            |                                                      |
| Mounting position recommended    | As high on your vehicle or structure as possible using a minimum 16mm hole or appropriate bracket with a 16mm hole                                                |            |                                                      |
| Installation tools required      | 11mm spanner for OB base securing<br>15mm spanner for whip to base securing - CR36/CR66<br>23mm spanner for whip to base securing - CR66-HD only                  |            |                                                      |



## CR whip series

Medium to heavy-duty whips with cable bases

AM/FM radio receive 530-1600kHz and 87.5-108MHz

  
In-stock  
Ready to  
Ship

Recommended installation accessories

|                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>BBM-SS - wrap around bull bar mount, up to 50mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>                                                                |  <p>BBML-SS - wrap around extra large bull bar mount, up to 65mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p> |
|  <p>BBMXL-SS - wrap around extra large bull bar mount, up to 76mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>                                                 |  <p>BBKB-B - Rhino knock down antenna mount, powder coated black</p> <p>17mm mount hole with cable slot</p>                                    |
|  <p>ATLM series - Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment</p> <p>16mm mount hole</p> <p>Black or Chrome</p> <p>Includes 5mm and 2mm allen keys</p> |  <p>GM1 - 304 stainless steel 'L' mount bracket</p> <p>16mm mount hole</p>                                                                    |
|  <p>GM2 - 304 stainless steel 'Z' mount bracket</p> <p>16mm mount hole</p>                                                                                                                      |  <p>GM6 - 304 stainless steel 'L' mount bracket with slot</p> <p>16mm mount slot</p>                                                          |
|  <p>MRM-SS - 304 stainless steel 'Mirror mount' bracket for up to 20mm capability</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>                                                       |  <p>A-6211 - 304 stainless steel offset mount bracket</p> <p>200mm offset</p> <p>16mm mount hole</p>                                          |
|  <p>MGB - black powdercoated magnetic base</p> <p>16mm mount hole</p> <p>20kg pull force</p> <p>105mm diameter</p>                                                                              |                                                                                                                                                                                                                                   |

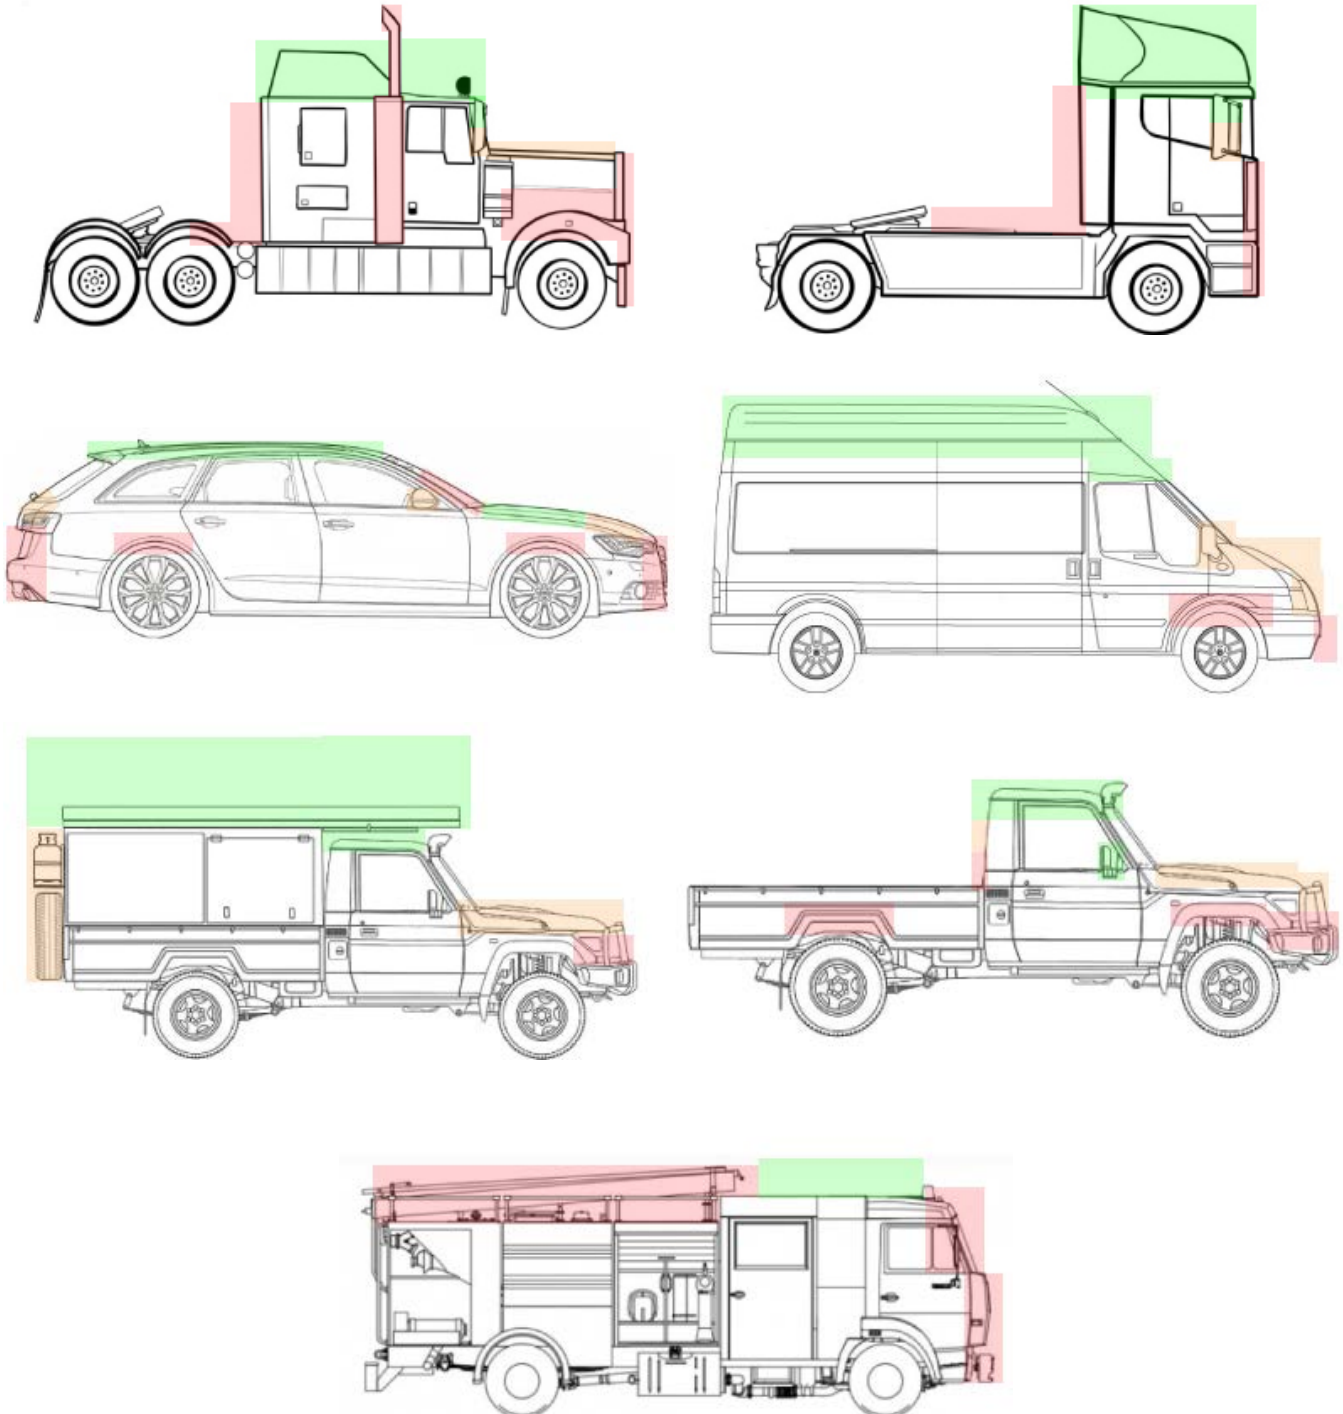
## CR whip series




Medium to heavy-duty whips with cable bases

AM/FM radio receive 530-1600kHz and 87.5-108MHz

  
In-stock  
Ready to  
Ship

Vehicle Mounting locations



-  Best/Recommended location for mounting
-  Suitable mounting locations
-  Not suitable mounting locations