

GRN Series

Highly flexible UHF ground independent whips UHF 330-665MHz

The GRN series of half wave UHF highly flexible mobile antennas are virtually unbreakable. Perfect for rugged off-road driving, forklifts and tractors. The GRNFC denotes a fixed cable exiting the bottom of the mount ferrule. The standard GRN series comes with a detachable 4.7 metres MIL-SPEC RG58A/U stranded coaxial cable base.

	GRN Series	GRNFC Series
Construction	Black flexible radome, black polyamide moulded ferrule, internal connector, detachable external cable assembly and coloured identification cap	
Frequency range select frequency or specify requirements	GRN/GRNFC340 - 330-350MHz*	GRN/GRNFC370 - 360-380MHz*
	GRN/ GRNFC385 - 375-395MHz*	GRN/ GRNFC410 - 400-420MHz*
	GRN/ GRNFC430 - 420-440MHz*	GRN/ GRNFC460 - 450-470MHz
	GRN/ GRNFC480 - 470-490MHz	GRN/ GRNFC510 - 500-520MHz
	GRN570 - 555-585MHz*	GRN650 - 635-665MHz*
Tuning	Factory	
VSWR	Average: <1.5:1, Maximum: <2:1	
Gain	4dBi	
Impedance	50 Ohms	
Maximum power	50 Watts	
Polarisation	Vertical	
Weight	360grams	320grams
Height & cap colour	GRN/ GRNFC340 - 450mm <u>Black</u>	GRN/ GRNFC370 - 430mm <u>Black</u>
	GRN/ GRNFC385 - 400mm <u>Green</u>	GRN/ GRNFC410 - 360mm <u>White</u>
	GRN/ GRNFC430 - 350mm <u>Brown</u>	GRN/ GRNFC460 - 340mm <u>Red</u>
	GRN/ GRNFC480 - 330mm <u>Blue</u>	GRN/ GRNFC510 - 310mm <u>Yellow</u>
	GRN570 - 425mm <u>Black</u>	GRN650 - 425mm <u>Black</u>
Connector	UHF male PL259 supplied, not fitted for ease of installation	
Cable	Detachable 4.7 metres MIL-SPEC RG58A/U*	4.7 metres MIL-SPEC RG58A/U fixed - bottom exit from base
Mounting hardware order separate	Bullbar: BBM-SS, BBML-SS, BBMXL-SS or BBKB-B Truck Mirror: MRM-SS Bracket Mounting: GM1, GM2, GM6	
Mounting position recommended	Mount as high on your vehicle or structure as possible using an appropriate 16mm (GRN) or 10mm (GRNFC) bracket or hole.	



GRN460 - Requires 18mm and 25mm spanners for securing base



GRNFC series - requires 14mm spanner for split nut securing

* can be supplied with 6.0-8.0 metre cable assembly upon request.

GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz

The GRN-TPM series of half wave UHF highly flexible mobile whip tops are virtually unbreakable. Perfect for rugged off-road driving, forklifts and tractors or where high risk of damage may occur.

Mounting hardware, adaptors, connectors and other installation accessories are all available separately.

Construction	Black nylon radome, moulded polyamide ferrule, internal termination and colour identification cap	
Frequency range select frequency/model	GRN340-TPM* - 330-350MHz	GRN350-TPM* - 340-360MHz
	GRN370-TPM* - 360-380MHz	GRN385-TPM* - 375-395MHz
	GRN390-TPM* - 380-400MHz	GRN410-TPM - 400-420MHz
	GRN430-TPM* - 420-440MHz	GRN460-TPM - 450-470MHz
	GRN480-TPM - 470-490MHz	GRN510-TPM* - 500-520MHz
	GRN570-TPM - 555-585MHz	GRN650-TPM - 630-650MHz
Tuning	Factory	
VSWR	Average: <1.5:1, Maximum: <2:1	
Gain	4dBi	
Impedance	50 Ohms	
Maximum power	50 Watts	
Polarisation	Vertical	
Weight	120grams	
Height and cap colour	GRN340-TPM - 450mm <u>Black</u>	GRN350-TPM - 440mm <u>Black</u>
	GRN370-TPM - 430mm <u>Black</u>	GRN385-TPM - 400mm <u>Green</u>
	GRN390-TPM - 410mm <u>Green</u>	GRN410-TPM - 360mm <u>White</u>
	GRN430-TPM - 350mm <u>Brown</u>	GRN460-TPM - 340mm <u>Red</u>
	GRN480-TPM - 330mm <u>Blue</u>	GRN510-TPM - 310mm <u>Yellow</u>
	GRN570-TPM - 425mm <u>Black</u>	GRN650-TPM - 425mm <u>Black</u>
Connector - supplied	UHF male located in base of ferrule	
Mounting hardware order separate	7994 - requires cable / RA-4.7/ RA-6.0/ RA-8.0 or MGB-UHF	
Mounting position recommended	Mount as high on your vehicle or structure using an appropriate base and 16mm holed bracket or magnetic base	




UHF male embedded into mount ferrule




GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz


Build To Order
*Build to order item
Minimum Order Qty 5

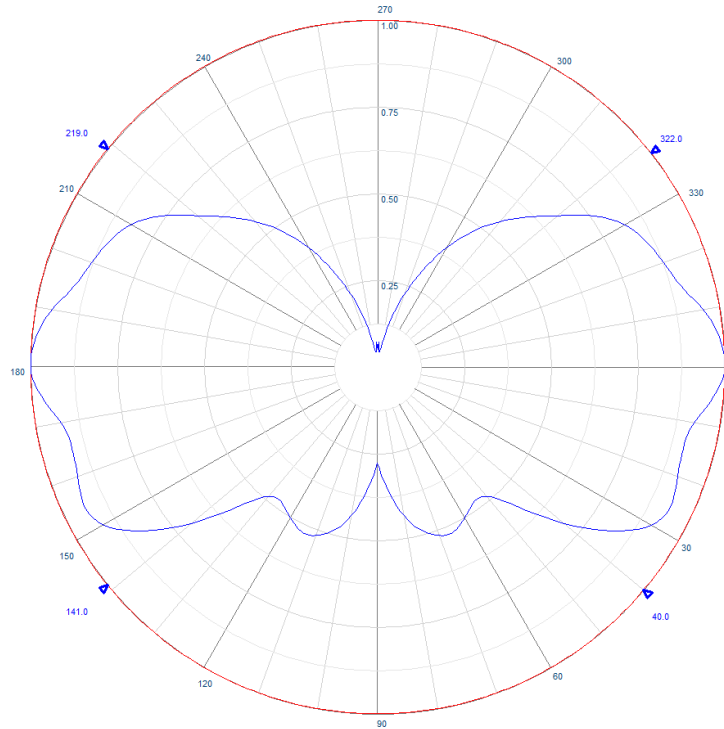

Example polar radiation pattern

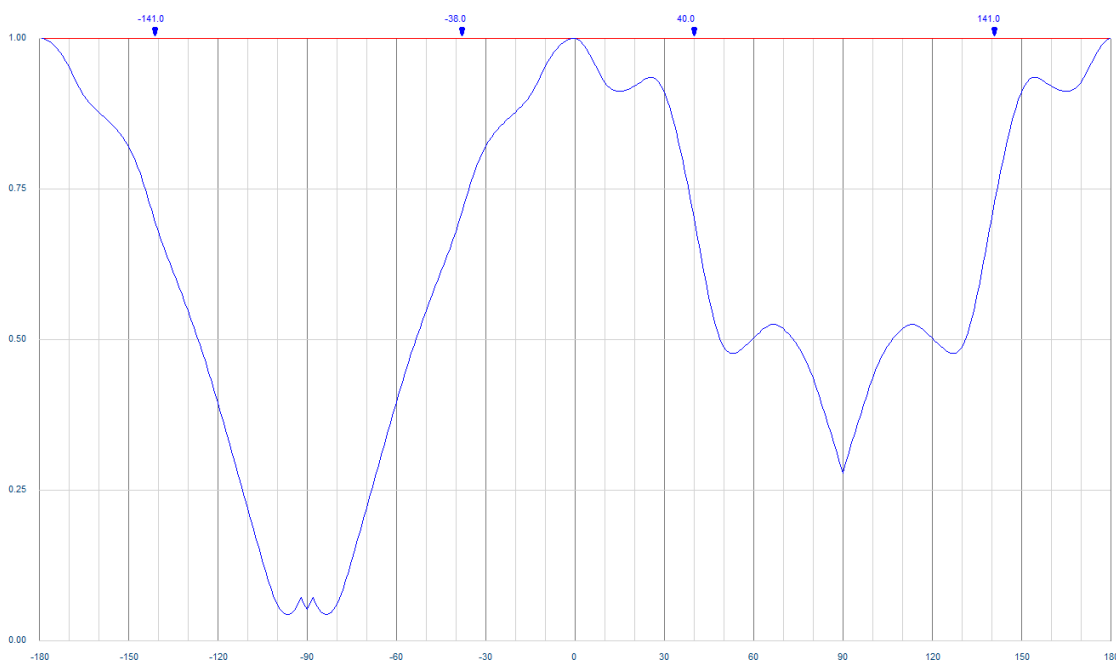


Example cartesian radiation pattern




GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz

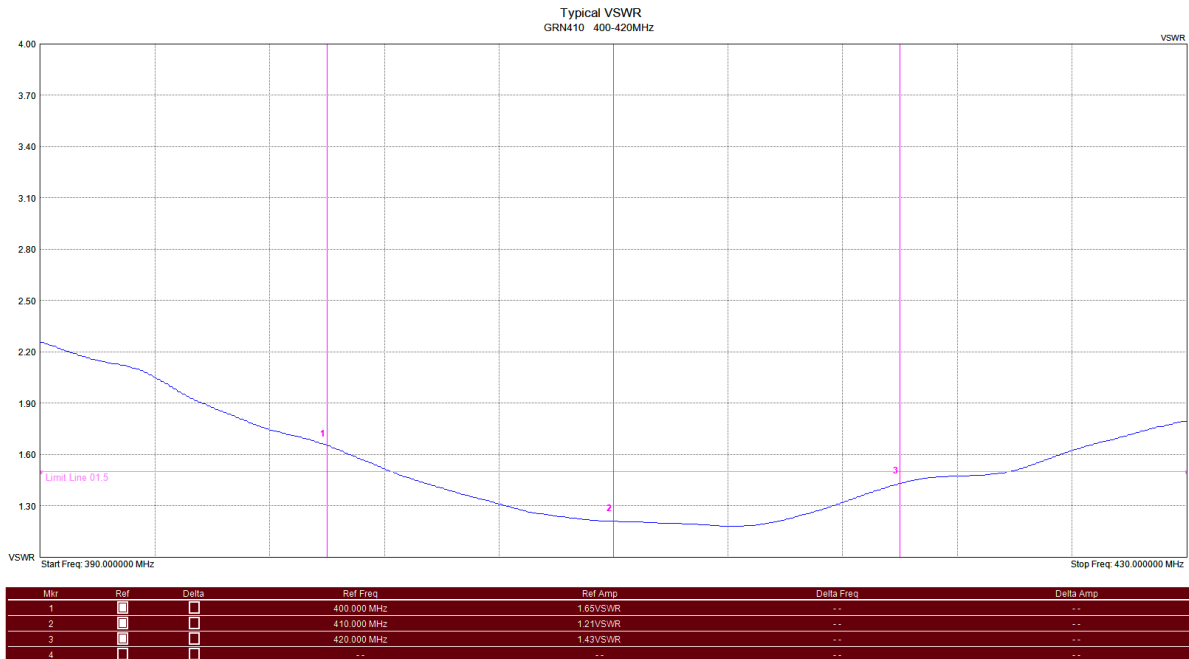

Typical VSWR - GRN410/GRN410-TPM

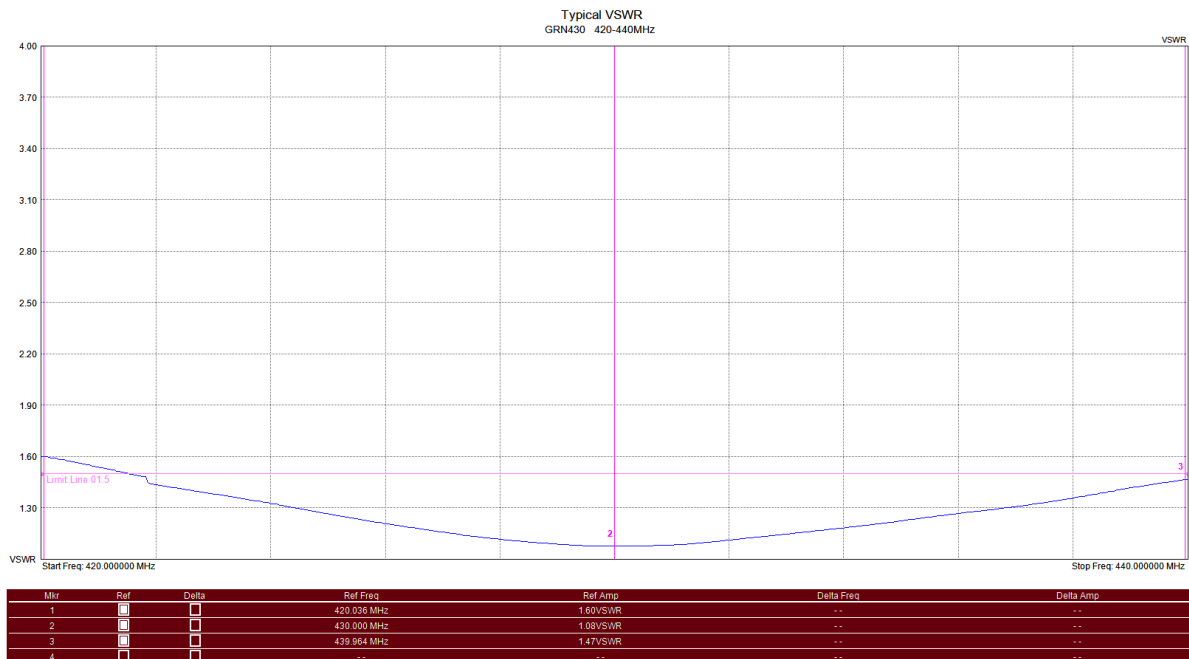


Typical VSWR - GRN430/GRN430-TPM




GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz


Build To Order
*Build to order item
Minimum Order Qty 5

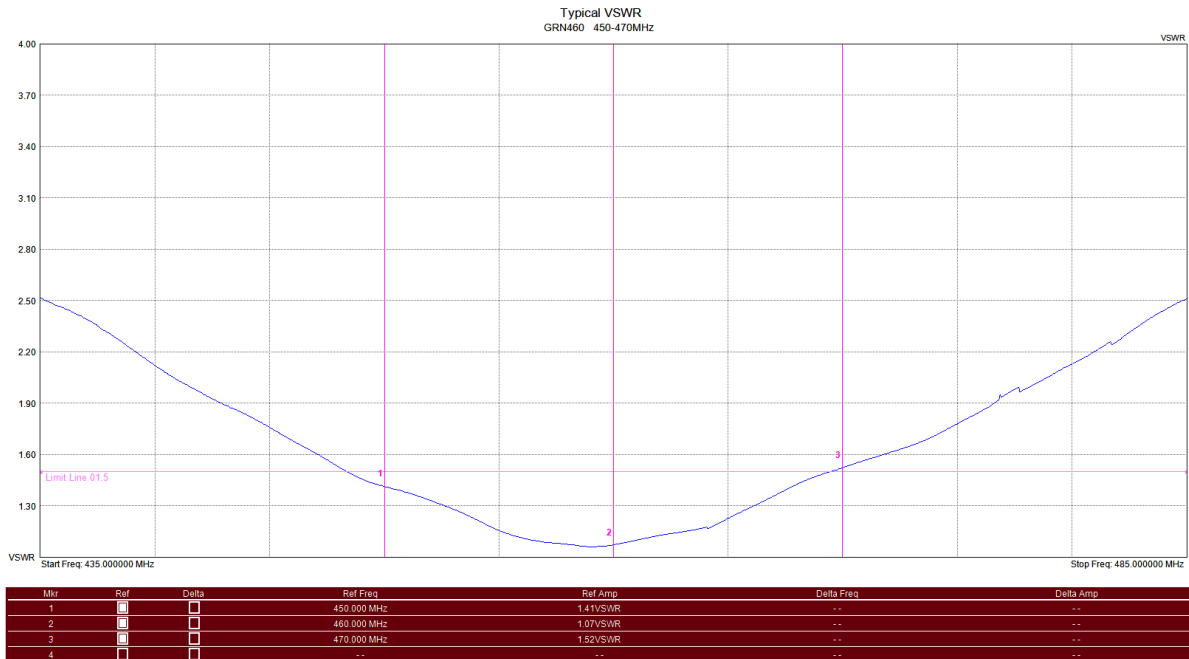

Typical VSWR - GRN460/GRN460-TPM

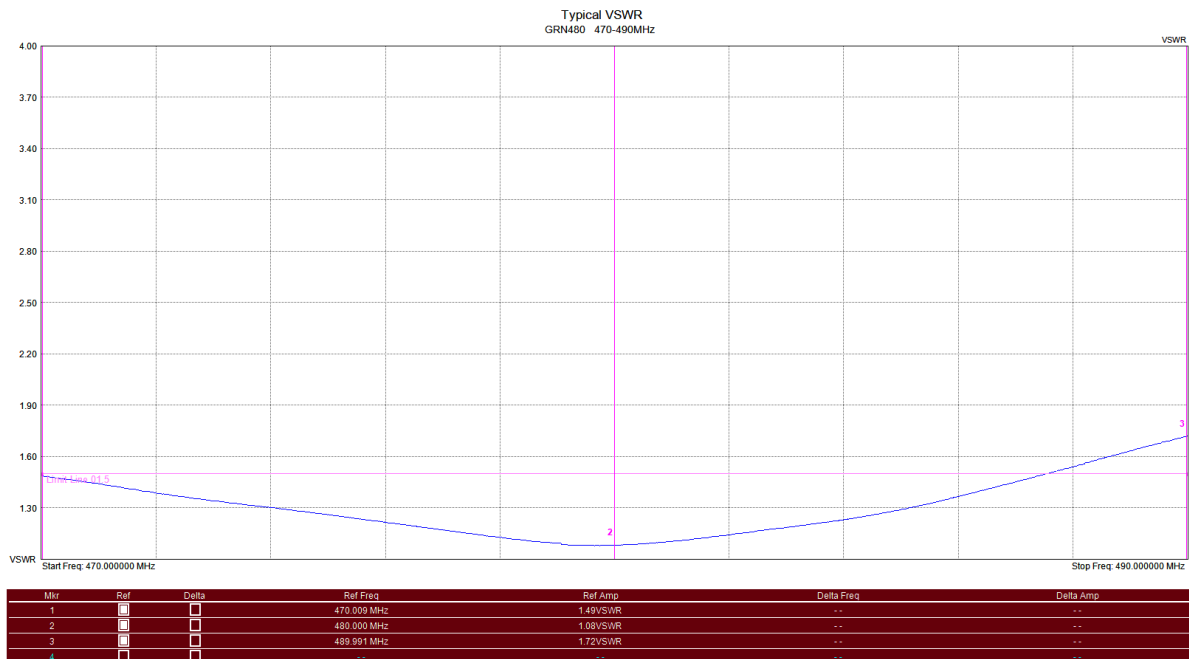

Typical VSWR - GRN480/GRN480-TPM

GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz

Recommended installation accessories - GRN-TPM series



P/N 7944 - right-angle UHF female connector, no cable

Requires 16mm mount hole
Requires 18mm & 25mm spanners



RA-4.7 - right-angle UHF female terminated 4.7m MIL-SPEC RG58A/U cable and UHF male PL259 connector supplied

Requires 16mm mount hole
Requires 18mm & 25mm spanners



MGB-UHF - Black powdercoated magnetic mount base, 4.7 metres MIL-SPEC RG58A/U coaxial cable, UHF male PL259 supplied

105mm diameter



ZMB-90 - Black powdercoated magnetic mount base, 5 metres MIL-SPEC RG58A/U coaxial cable, UHF male PL259 fitted

90mm diameter

Additional installation accessories



BBM-SS series - wrap around mount, 50-70mm diameter tube capability

16mm mount hole

Requires 10mm spanner



GM1 - 304 stainless steel 'L' mount bracket

16mm mount hole



GM2 - 304 stainless steel 'Z' mount bracket

16mm mount hole



GM6 - 304 stainless steel 'L' mount bracket with mount slot

16mm mount slot



MRM-SS - 304 stainless steel 'Mirror mount' clamp bracket

16mm mount hole

Requires 10mm spanner




A-6211 - 304 stainless steel 'L' offset mount bracket, 200mm offset

16mm mount hole

GRN-TPM Series

Highly flexible UHF Ground independent replacement whips
UHF 330-650MHz

Vehicle Mounting locations

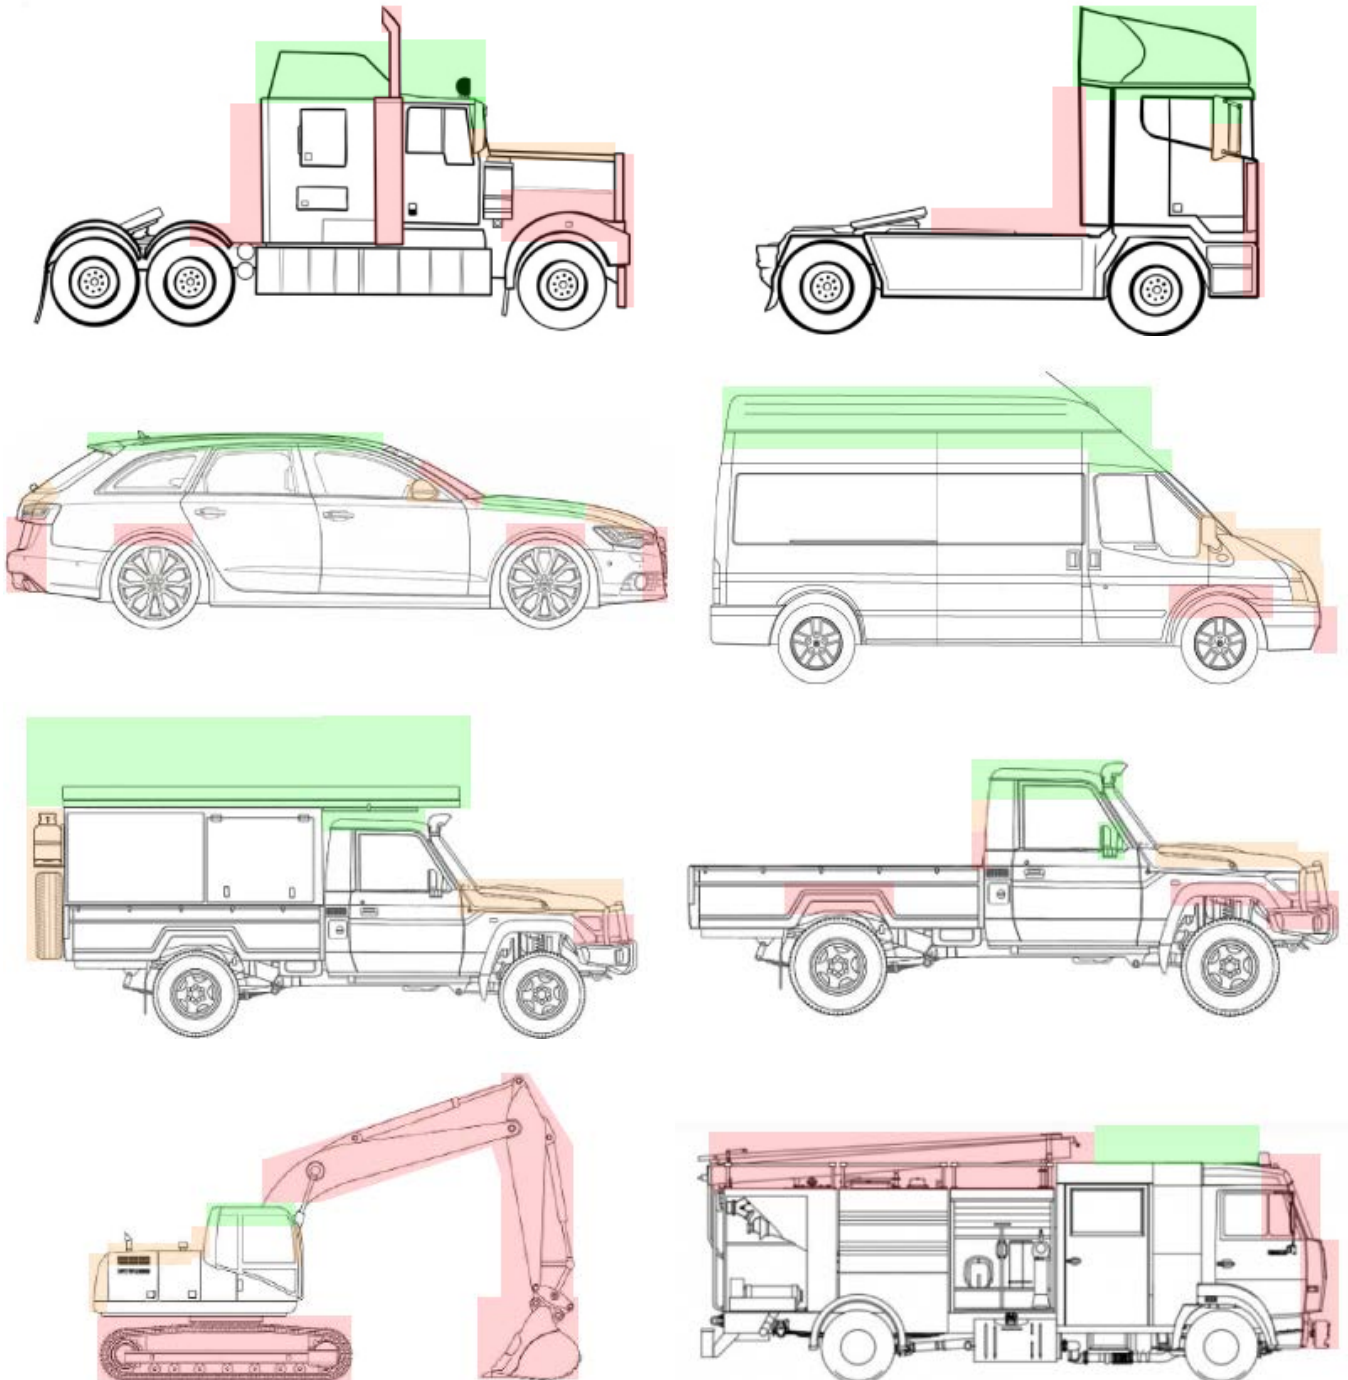

- Best/Recommended location for mounting
- Suitable mounting locations
- Not suitable mounting locations