

ZN3-77-06BLKR

All-black Stubby “quick-fit” rugged fibreglass collinear

UHF CB radio 477 MHz

For a rugged low profile 477 MHz UHF CB Radio antenna in an all-black finish, the ZN3-77-06BLKR is the ideal model to decrease visual impairment whilst driving and maintain the tough aesthetics of the front of your vehicle.

Mounting hardware, connectors and other installation accessories are all available separately.

Construction	Rugged ‘stubby’ fibreglass radome, black finish aluminium ferrule, black finish stainless steel ‘barrel’ spring, external coaxial cable, termination and adaptor
Frequency range	477 MHz - UHF CB radio
Bandwidth	476.4125 - 477.4125 MHz - covering all 40/80 channels
VSWR	<1.5:1
Tuning	Factory
Gain	2.1dBi - suits hilly terrain or inner CBD locations
Maximum power	100 Watts
Impedance	50 Ohms
Polarisation	Vertical
Connector	UHF Male PL259 supplied not fitted
H Plane	360° omnidirectional
Height	650mm - including spring base
Weight	200grams
Mounting hardware	Bracket: GM1, GM2, GM4, GM6 or ATLM series Bull bar mount: BBM-SS, BBML-SS, BBMXL-SS or BBKB-B Mirror mount: MRM-SS
Minimum mount hole size	16mm
Mounting position	Mount as high on your vehicle or structure as possible using an appropriate hole or appropriate bracket
Installation tools required	19mm spanner for split nut/spring securing 1/8" allen key for mount ferrule securing - supplied
Replacement tops (In-stock)	ZN3-77-06W-TPM - White radome, aluminium ferrule ZN3-77-06BLKR-TPM - All-black radome and ferrule




FME female fitted to cable




FME male to UHF male PL259 adaptor

ZN3-77-06BLKR

All-black Stubby "quick-fit" rugged fibreglass collinear
UHF CB radio 477 MHz

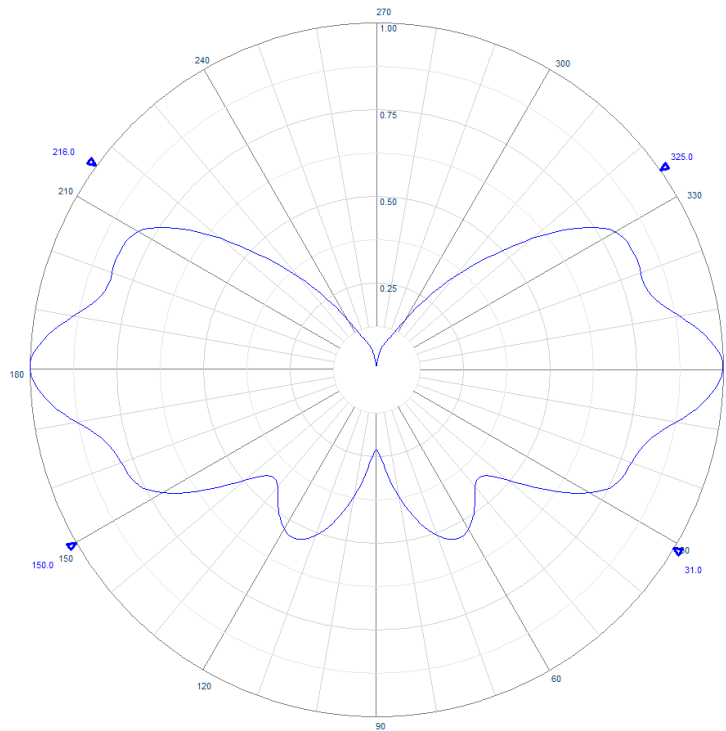

Example radiation pattern

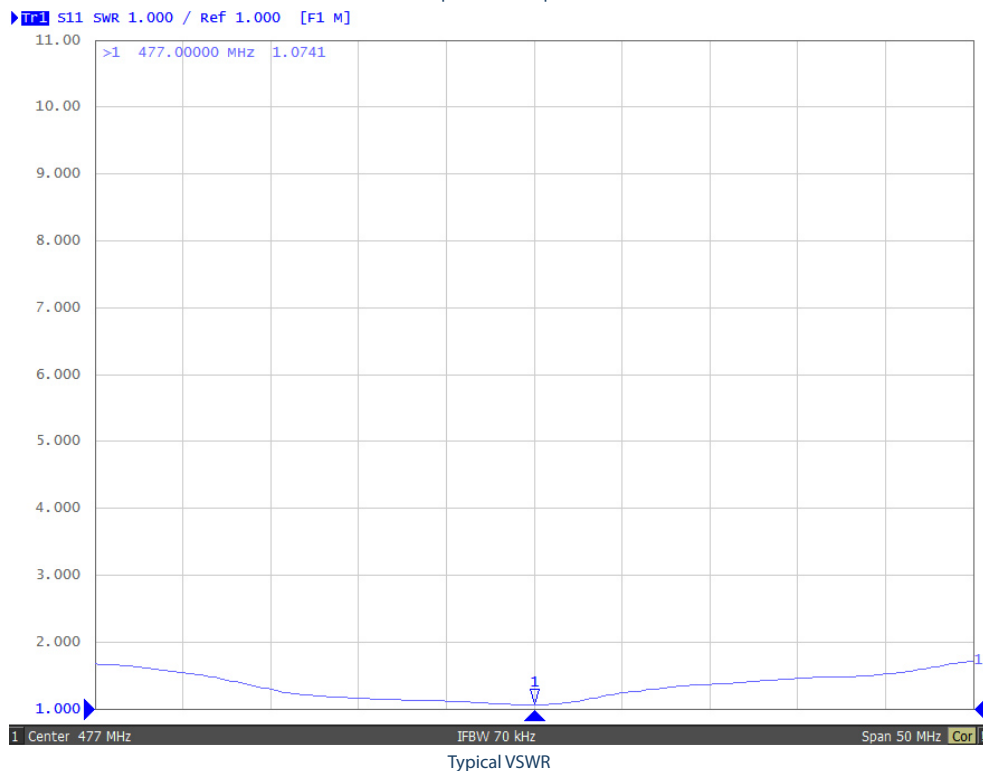

ZN3-77-06BLKR

All-black Stubby "quick-fit" rugged fibreglass collinear

UHF CB radio 477 MHz

Recommended installation accessories

 <p>BBM-SS - wrap around bull bar mount, up to 50mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>	 <p>BBML-SS - wrap around extra large bull bar mount, up to 65mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>
 <p>BBMXL-SS - wrap around extra large bull bar mount, up to 76mm diameter bull bar tube</p> <p>16mm mount hole</p> <p>Requires 10mm spanner</p>	 <p>BBKB-B - Knock-down antenna mount, powder coated black</p> <p>16mm mount hole with 5.5mm cable hole</p>
 <p>ATLM series - Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment</p> <p>16mm mount hole</p> <p>Black or Chrome</p> <p>Includes 5mm and 2mm allen keys</p>	 <p>GM1 - 304 stainless steel 'L' mount bracket</p> <p>16mm mount hole</p>
 <p>GM2 - 304 stainless steel 'Z' mount bracket</p> <p>16mm mount hole</p>	 <p>GM6 - 304 stainless steel 'L' mount bracket with slot</p> <p>16mm mount slot</p>


Alternate magnetic mounting




 <p>MGB - Black powdercoated magnetic mount base, 105mm diameter, 20kg pull force</p> <p>16mm mount hole</p>

ZN3-77-06BLKR

All-black Stubby “quick-fit” rugged fibreglass collinear
UHF CB radio 477 MHz

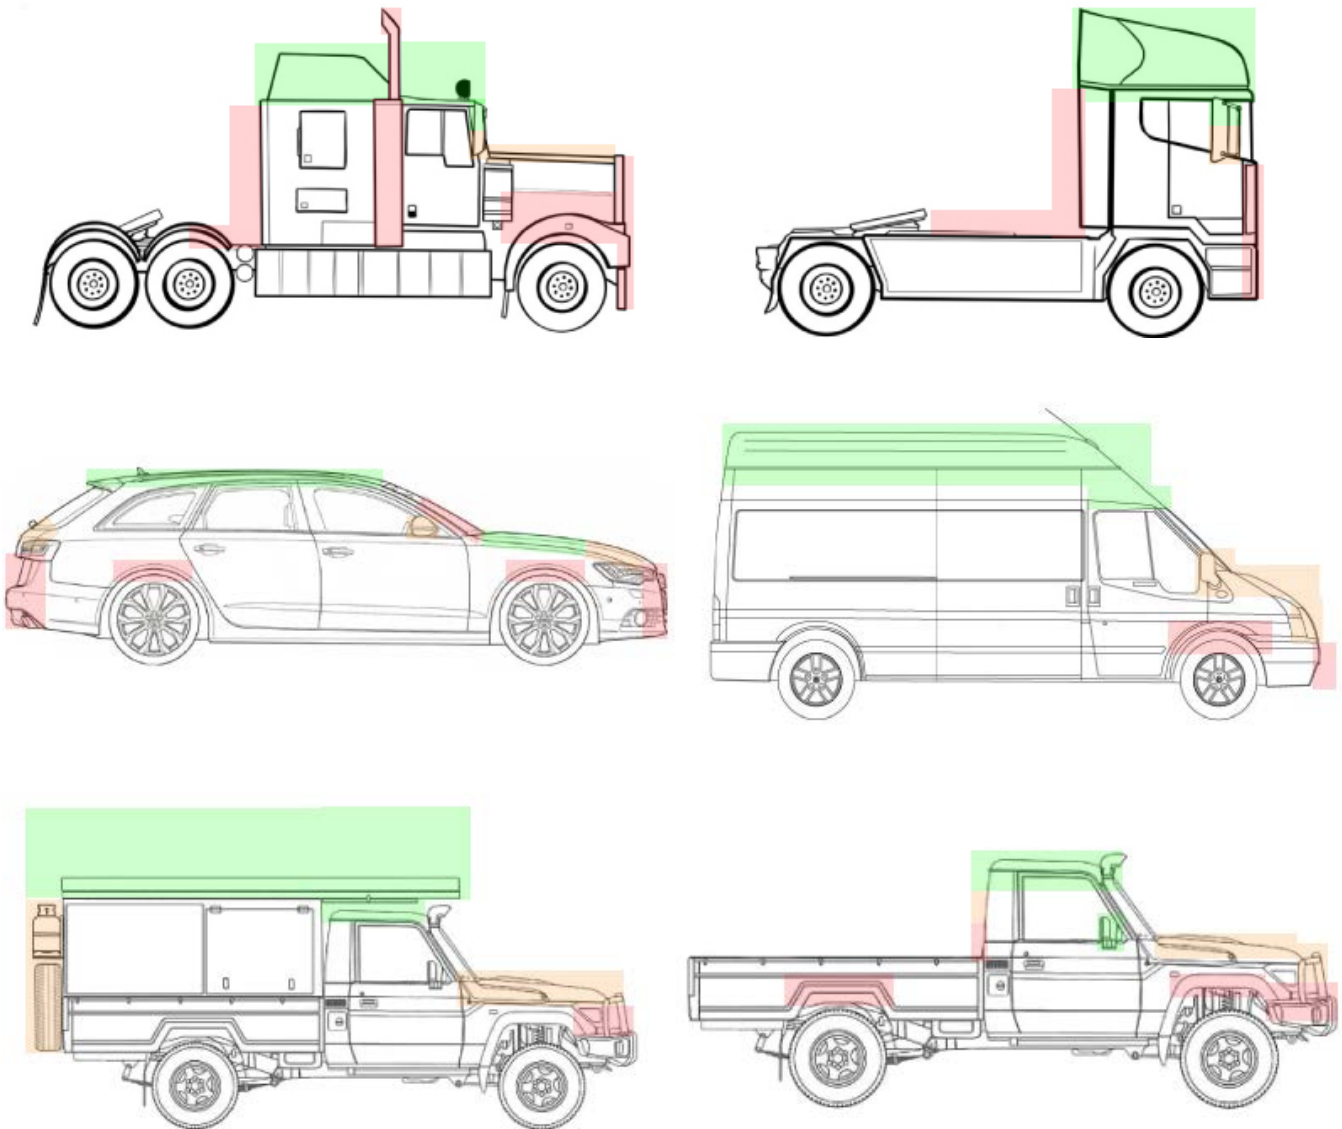Vehicle Mounting locations



 Best/Recommended location for mounting
 Suitable mounting locations
 Not suitable mounting locations