

## ZN4-77-06SBLKR

**All-black light to medium-duty fibreglass whip and parallel spring base**

**UHF CB Radio 477 MHz**

The ZN4-77-06SBLKR is a all-black ground independent UHF CB Radio antenna perfect for small to medium vehicles or fixed position mounting.

The ZN4-77-06SBLKR is fitted with a parallel spring suitable for light to medium duty applications, for medium to heavy-duty or extreme conditions consider using the ZN4-77-06BLKR 'barrel' spring model.

Mounting hardware, connectors and other installation accessories are all available separately.

Construction	Black heatshrunk fibreglass whip, delrin, black finish elevated feed base, black finish stainless parallel spring base and cable assembly
Frequency range	477 MHz - UHF CB Radio
Bandwidth	476.4125 - 477.4125 MHz - all 40/80 channels
VSWR	<1.5:1
Tuning	Factory
Gain	6.6 dBi - suits mostly flat to mild hilly terrain
Maximum power	50 Watts
Impedance	50 Ohms
Polarisation	Vertical
H Plane	360° omnidirectional
Cable	4.5 metres RG58 low loss - bottom exit from spring base
Connector	FME female fitted to cable - for ease of installation
Adaptor - supplied	FME male to UHF male PL259
Height	900mm
Weight	500grams
Mounting hardware order separate	Bullbar: BBM-SS, BBML-SS, BBMXL-SS, BBKB-B or ATLM series Truck Mirror: MRM-SS Bracket Mounting: GM1, GM2, GM6
Mounting position recommended	As high on your vehicle/structure as possible using a minimum 13mm hole or appropriate bracket with a 13mm hole
Installation tools required	22mm spanner for nut securing



Light to medium-duty black finish stainless steel parallel spring base



FME female jack connector fitted to cable



FME male to UHF Male PL259 adaptor




## ZN4-77-06SBLKR


All-black light to medium-duty fibreglass whip and parallel spring base

UHF CB Radio 477 MHz

  
In-stock  
Ready to  
Ship

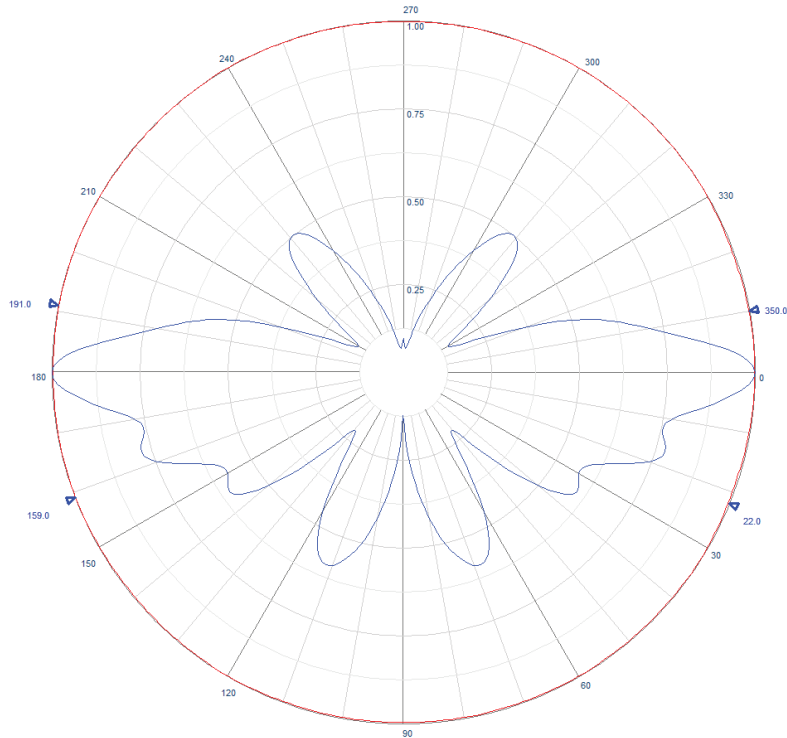

Example radiation pattern

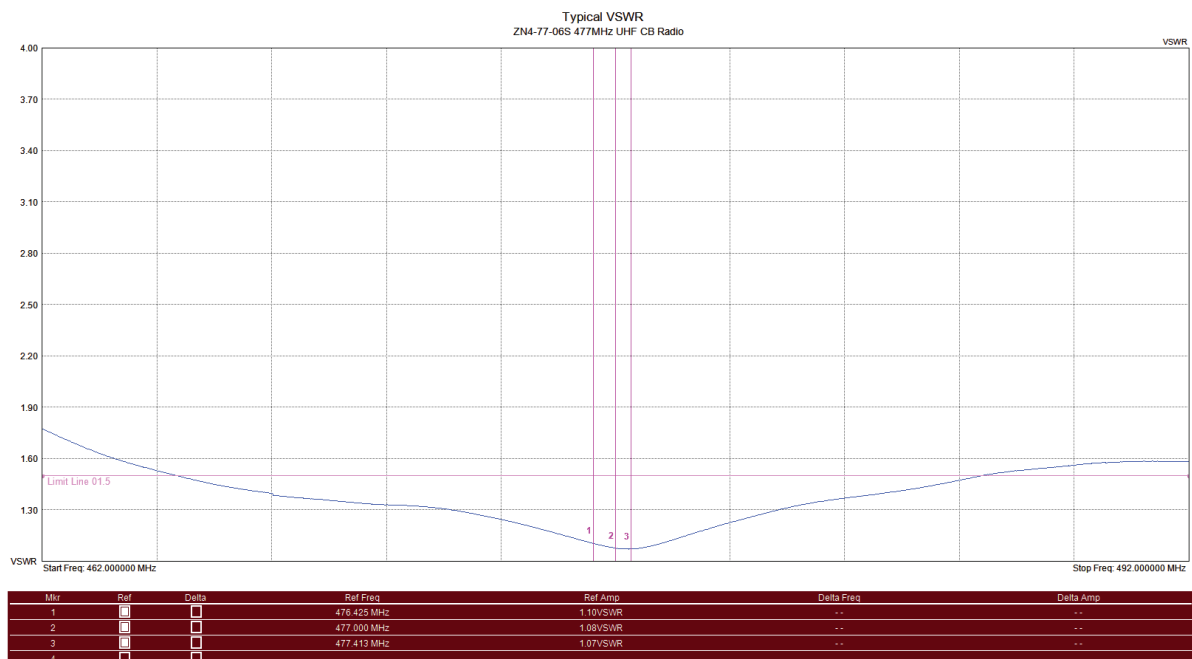

Typical VSWR

## ZN4-77-06SBLKR

All-black light to medium-duty fibreglass whip and parallel spring base

UHF CB Radio 477 MHz

### Recommended installation accessories


 <p><b>SKU: BBM-SS</b> Wrap around bull bar mount, up to 50mm diameter bull bar tube 16mm mount hole Requires 10mm spanner</p>	 <p><b>SKU: BBMXL-SS</b> Wrap around extra large bull bar mount, up to 76mm diameter bull bar tube 16mm mount hole Requires 10mm spanner</p>
 <p><b>SKU: ATLM-B</b> Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment 16mm mount hole Includes 5mm and 2mm allen keys</p>	 <p><b>SKU: BBKB-B</b> Knock-down antenna mount, powder coated black 16mm mount hole with 5.5mm cable hole</p>
 <p><b>SKU: MRM-SS</b> 304 stainless steel clamp style mirror mount 16mm mount hole Requires 10mm spanner</p>	 <p><b>SKU: GM1</b> 304 stainless steel 'L' mount bracket 16mm mount hole</p>
 <p><b>SKU: GM2</b> 304 stainless steel 'Z' mount bracket 16mm mount hole</p>	 <p><b>SKU: GM6</b> 304 stainless steel 'L' mount bracket 16mm mount slot</p>
 <p><b>SKU: A-6211</b> 304 stainless steel offset mount bracket, 200mm offset 16mm mount hole</p>	

## ZN4-77-06SBLKR

All-black light to medium-duty fibreglass whip and parallel spring base

UHF CB Radio 477 MHz

Vehicle Mounting locations

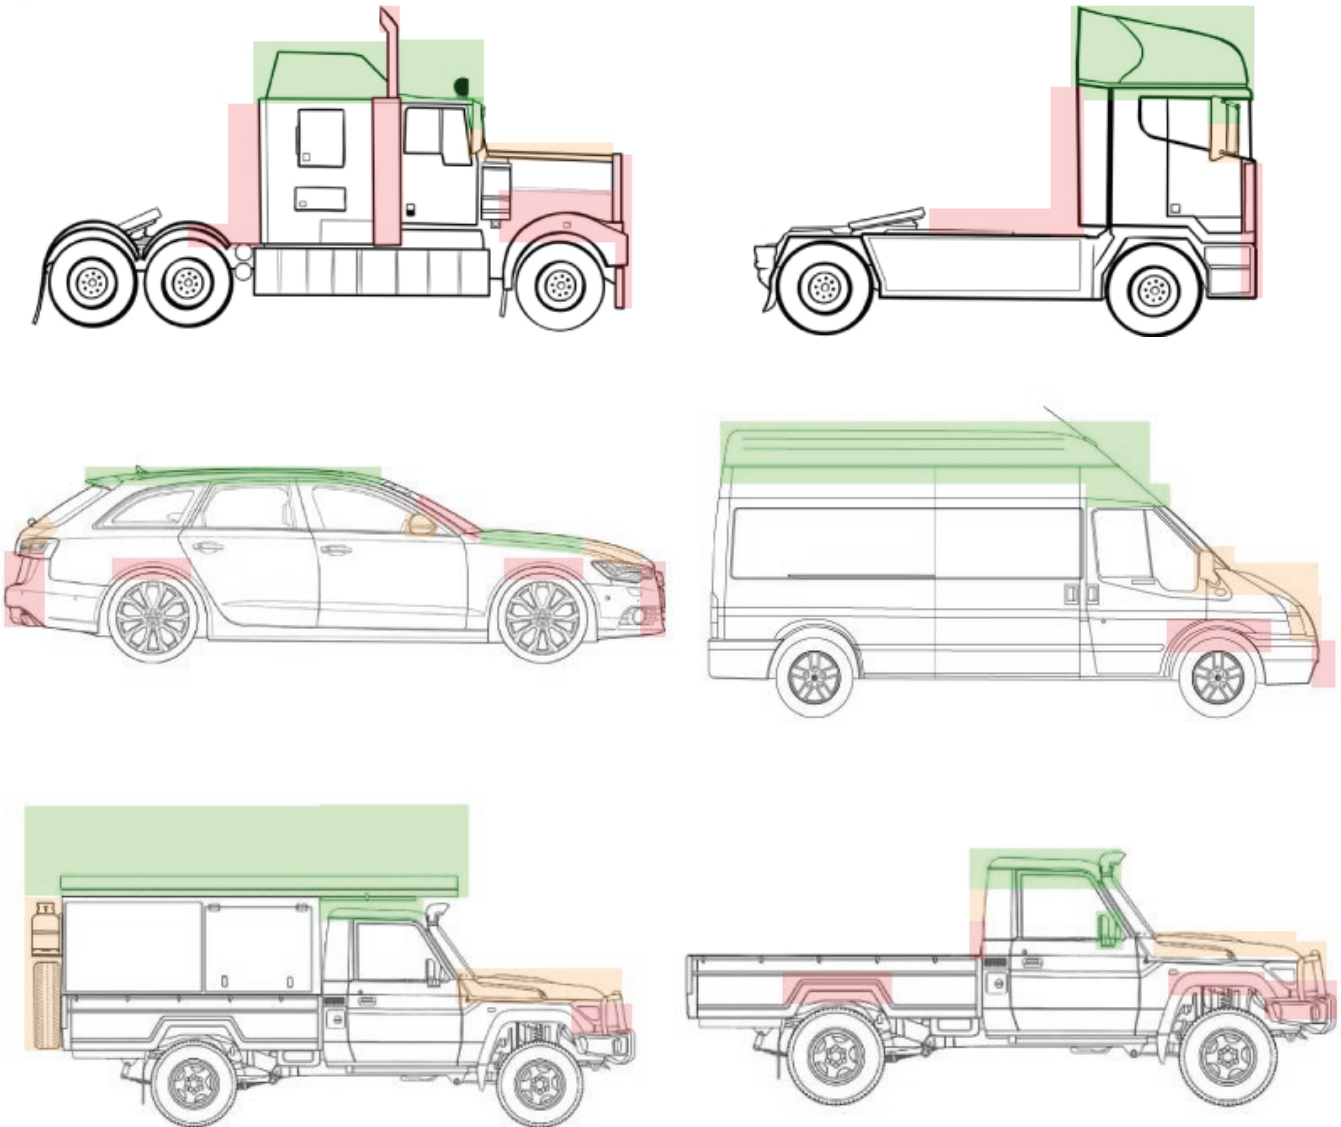

- Best/Recommended location for mounting
- Suitable mounting locations
- Not suitable mounting locations