

RF Max Inter Series Adaptors

7/8" EIA, 1-5/8" EIA, 3-1/8" EIA & 6-1/8" EIA

Page 1 of 4



RF MAX Inter Series EIA Adaptors are constructed from high quality brass and teflon components providing high level performance and reliability.

The adaptors can be used for field testing applications or permanent interconnection between equipment.

All of these adaptors are built to order.

Combination Kits can be assembled to suit your requirements.

KEY FEATURES

- High Quality Components
- Frequency Range : 40 MHz – 1 GHz
- Characteristic Impedance : 50 Ohm
- Rugged Construction




APPLICATIONS

- Broadcast Measurements
- Cellular Measurements
- Test and Measurement
- Permanent Interconnection

PERFORMANCE

- Low Thru-Loss : 0.01 dB
- Return Loss : < -26 dB over band
- VSWR : < 0.043:1
- Impedance : 50 Ω ± 2.0 Ω

TYPICAL RESPONSE

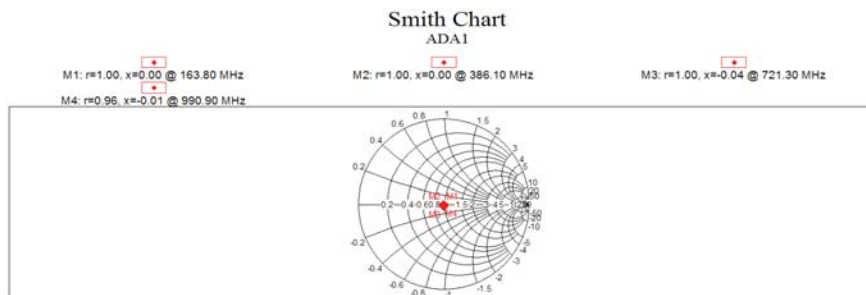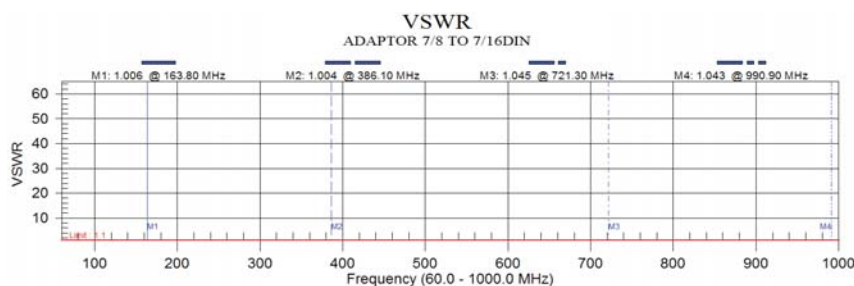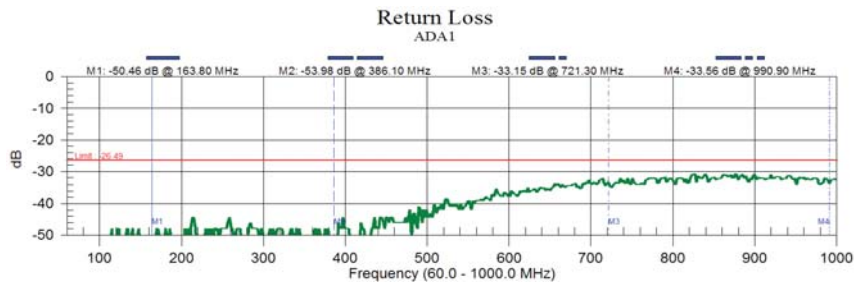

Resolution: 517
Date: Oct/16/2007

CAL:ON(COAX)
Time: 17:20:06

CW OFF
Prop.Vel: 800

RF Max Inter Series Adaptors

7/8" EIA Adaptors

Page 2 of 4

EIA78F-NJ



7/8" EIA Flanged to N-Type Female Adaptor
500 Watts

EIA78F-NP



7/8" EIA Flanged to N-Type Male Adaptor, includes 7/8" EIA Joining Bullet, 500 Watts

EIA78F-716F-SC



7/8" EIA Flanged to 7/16" DIN Female Adaptor, includes 7/8" EIA Joining Bullet, 2 kW

EIA78F-716M-SC



7/8" EIA Flanged to 7/16" DIN Male Adaptor, includes 7/8" EIA Joining Bullet, 2 kW

EIA78F716MRA



7/8" EIA Flanged to 7/16" DIN Male Right-Angle Adaptor, inc 7/8" EIA Joining Bullet, 2 kW

1680



Joining Bullet Only for 7/8" EIA Connector

EIA78 BULLET



Bullet Kit for 7/8" EIA Connector, includes O Ring and 3 x Nuts-Bolts-Washers

RF Max Inter Series Adaptors

1-5/8" EIA

Page 3 of 4

EIA158F-NJ



1-5/8" EIA Flanged to
N-Type Female Adaptor
500 Watts

EIA158U-78F



1-5/8" EIA Unflanged to
7/8" EIA Flanged Adaptor
5 Kilowatts

EIA158F-78FCPL



1-5/8" EIA Flanged to
7/8" EIA Flanged Adaptor
5 Kilowatts

EIA158U-158F



1-5/8" EIA Unflanged to
1-5/8" EIA Flanged Adaptor
5 Kilowatts

EIA158 BULLET



Joining Bullet for
1-5/8" EIA Flanged Connector

3389-3



Joining Bullet for
1-5/8" EIA Unflanged Connector

RF Max Inter Series Adaptors

3-1/8" EIA or 6-1/8" EIA

Page 4 of 4

EIA318U-78F



3-1/8" EIA Unflanged to
7/8" EIA Flanged Adaptor
5 Kilowatts

EIA318 BULLET



Joining Bullet Only for
3-1/8" EIA Connector

EIA618F-NJ



6-1/8" EIA Flanged to
N-Type Female Adaptor, includes
6-1/8" EIA Bullet, 500 Watts