





BF-7921-2

BNC female crimp coaxial connector

For MIL-SPEC RG58 Low Loss coaxial cable

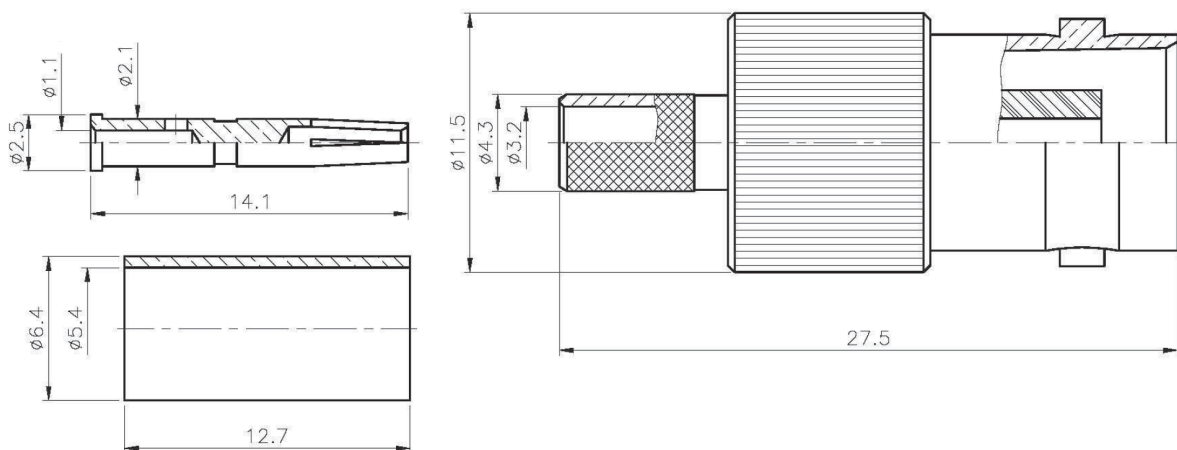

Compatible coaxial cables	According to IEC 60169-8
Frequency range	DC - 4 GHz
VSWR	≤1.25:1 at DC-3 GHz
Impedance	50Ω (Ohms)
Weight (per unit)	14 grams
Durability	≥500 mating cycles
Recommended crimp size	Crimp centre pin: 0.68" (1.72mm) Crimp sleeve/ferrule: 0.213" (5.41mm)
Compatible coaxial cables	SKU: 7839-100/300 : RG58 Low Loss - MIL-SPEC, solid copper core, foam PE dielectric, black PE jacket - <u>available in white jacket.</u>
RoHS Compliant	Yes



Construction	
Body	Nickel plated brass
Insulator	PTFE (teflon)
Centre contact	Gold plated phosphor bronze
Coupling nut	Nickel plated brass
Crimp ferrule	Nickel plated annealed copper



RG58LL
SKU: 7839
100m or 300m roll