


SMA, SMB & SMC connectors


Page 1 of 3


In-stock
Ready to
Ship
* Signifies build to order item

7901




SMA male crimp connector
For RG174/RG316 cable




A = 12.0 mm
B = 5.0 mm
C = 3.0 mm

7901-3




SMA male crimp connector
For RG174/RG316 cable




A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7963-3



Right-angle SMA male solder pin crimp connector
For RG58 cable



A = 14.0 mm
C = 3.0 mm

7963-4




Reverse SMA male solder pin crimp connector
For RG58 cable




A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

7963-7




SMA male crimp connector
For RG58/RG223 cable




A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7963-8



SMA male right-angle solder pin crimp connector
For RG316/RG174 cable



A = For strip dimensions
B = dimensions
C = consult ZCG

7963-10




Reverse SMA male solder pin crimp connector
For RG174 cable




A = 12.1 mm
B = 5.1 mm
C = 3.3 mm

7963-13



SMA male right-angle solder pin crimp connector
For RG316/RG118/
RG174 cable



A = 12.6 mm
B = 5.8 mm
C = 2.5 mm

7963-14*




SMA male right-angle solder pin crimp connector
For RG179 cable




A = For strip dimensions
B = dimensions
C = consult ZCG

8204




SMA male crimp connector
RG142 cable
suco-plated




For strip dimensions
consult ZCG

8211




SMA male crimp connector
For LMR240™ cable
Gold plated




For strip dimensions
consult ZCG

8225



SMA male crimp connector
For RG178 cable
Tri-metal plated
Low P.I.M.



For strip dimensions
consult ZCG

8277



Right-angle SMA male solder pin crimp connector
For RG178/RG316 cable
Gold plated



For strip dimensions
consult ZCG

8313



SMA male solder pin crimp connector
For RU400 cable



A = 17.5 mm
B = 8.5 mm
C = 3.5 mm


SMA, SMB & SMC connectors

Page 2 of 3


In-stock
Ready to
Ship
* Signifies build to order item

7901-2


SMA female bulkhead solder pin crimp connector
For RG174/RG316 cable

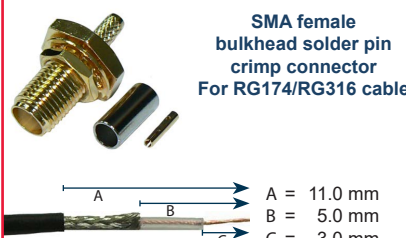

A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7901-4

SMA female bulkhead solder pin crimp connector
For RG178 cable

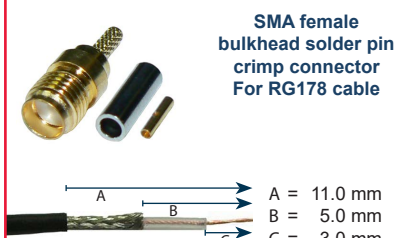

A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7901-5*

SMA female solder pin crimp connector
For RG174/RG316 cable



A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7901-6*


SMA female bulkhead crimp connector
For RG179 cable



A = For strip dimensions
B = 5.0 mm
C = consult ZCG

7901-7


SMA female reverse polarity bulkhead crimp connector
For RG316/RG174 cable

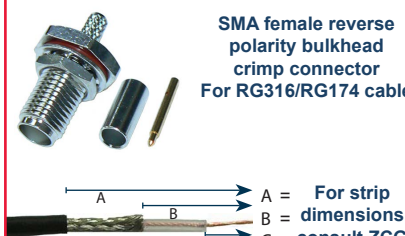

A = For strip dimensions
B = 5.0 mm
C = consult ZCG

7901-9


SMA female bulkhead connector jack for RG58 low loss solid core cable

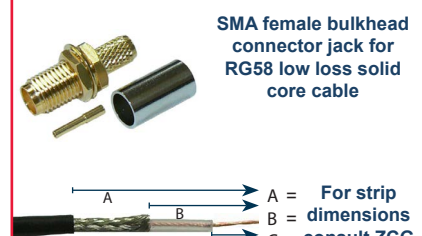

A = For strip dimensions
B = 5.0 mm
C = consult ZCG

7950

SMA female panel mount solder connector



C = 4.0 mm

7963-2


SMA female crimp connector
For RG58 cable



A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8205

SMA female panel mount solder connector
sucleplated

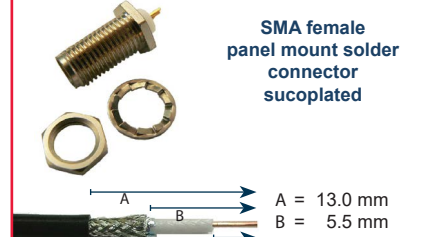

A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8225-2

SMA female bulkhead crimp connector
For RG178 cable



For strip dimensions consult ZCG

8268


Reverse SMA female crimp connector
For RG58 cable



A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8276-2

Reverse polarity SMA female solder pin crimp connector
For RG174/RG316 cable

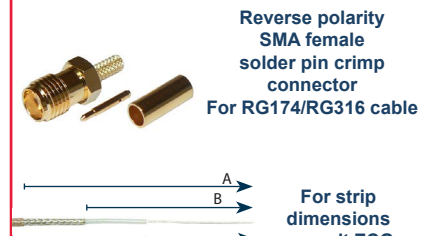

For strip dimensions consult ZCG

8313-2

SMA female solder pin crimp connector
For RU400 cable



A = 11.0 mm
FOLD BRAID BACK
B = 4.25 mm

SMB connectors on the following page.


SMA, SMB & SMC connectors


In-stock
Ready to
Ship

Page 3 of 3

8279


SMB female crimp connector
For RG174/RG316 cable

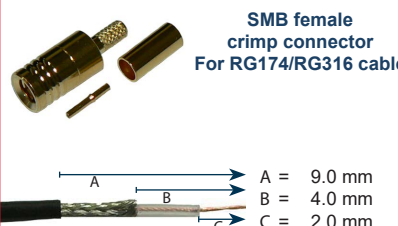

A = 9.0 mm
B = 4.0 mm
C = 2.0 mm

8279-2


SMB male crimp connector
For RG174/RG316 cable

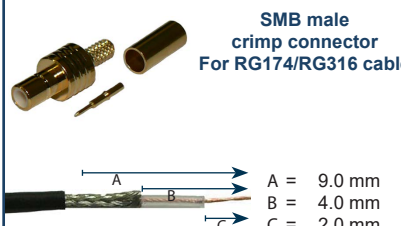

A = 9.0 mm
B = 4.0 mm
C = 2.0 mm

8279-3


SMB female right-angle solder pin crimp connector
For RG179 cable

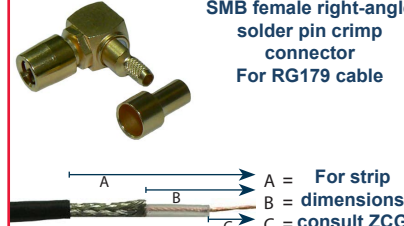

A = For strip
B = dimensions
C = consult ZCG

8296


SMC male crimp connector
For RG174/RG316 cable
Solder or crimp pin

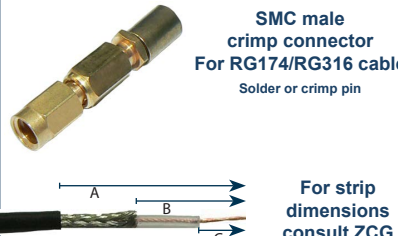

For strip
dimensions
consult ZCG

8304

SMC reverse male crimp connector
For RG174/RG316 cable

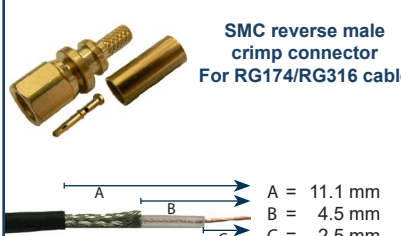

A = 11.1 mm
B = 4.5 mm
C = 2.5 mm

8304-2

Reverse SMC female crimp connector
For RG174/RG316 cable



A = 13.0 mm
B = 5.5 mm
C = 2.5 mm