


SMA, SMB & SMC connectors

Page 1 of 2

7901


SMA male crimp connector
For RG174/RG316 cable

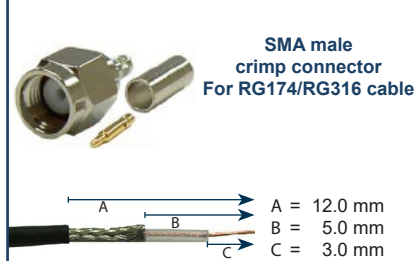

A = 12.0 mm
B = 5.0 mm
C = 3.0 mm

7901-3


SMA male crimp connector
For RG174/RG316 cable

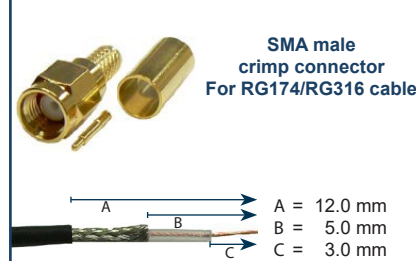

A = 12.0 mm
B = 5.0 mm
C = 3.0 mm

7963-3

Right-angle SMA male connector, crimp sleeve with solder pin
For RG58 cable

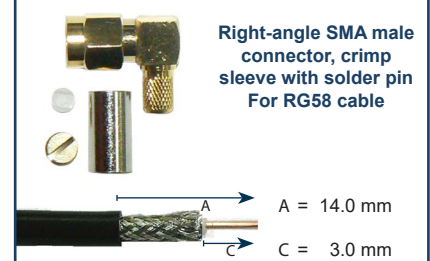

A = 14.0 mm
C = 3.0 mm

7963-4


Reverse SMA male crimp connector
For RG58 cable



A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

7963-7

SMA male crimp connector
For RG58 cable



A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7963-10


Reverse SMA male crimp connector
For RG174 cable



A = 12.1 mm
B = 5.1 mm
C = 3.3 mm

7963-12


SMA male crimp connector
For RG223 cable

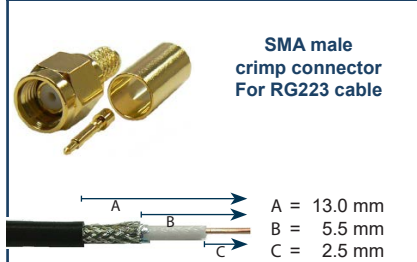

A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8204


SMA male crimp connector
RG142 cable
sucoplated

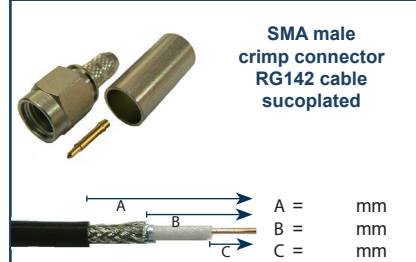

A = mm
B = mm
C = mm

8225


SMA male crimp connector
For RG178 cable
Tri-metal plated
Low P.I.M.

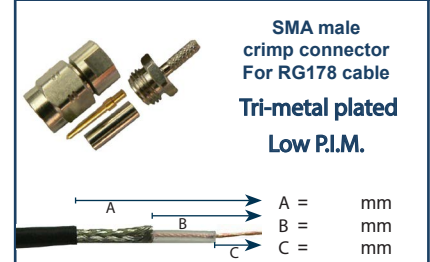

A = mm
B = mm
C = mm

8313

SMA male crimp connector
For RU400 cable





A = 11.0 mm
FOLD BRAID BACK
B = 4.25 mm

SMA, SMB & SMC connectors

Page 2 of 2

7901-2



SMA female bulkhead crimp connector
For RG174/RG316 cable

A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7901-4

SMA female bulkhead crimp connector
For RG178 cable

A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7901-5



SMA female crimp connector
For RG174/RG316 cable




A = 11.0 mm
B = 5.0 mm
C = 3.0 mm

7950



SMA female panel mount solder connector

C = 4.0 mm

7963-2



SMA female crimp connector
For RG58 cable

A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8205



SMA female panel mount solder connector
suo-plated

A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8268



Reverse SMA female crimp connector
For RG58 cable

A = 13.0 mm
B = 5.5 mm
C = 2.5 mm

8313-2

SMA female crimp connector
For RU400 cable

A = 11.0 mm
FOLD BRAID BACK
B = 4.25 mm

8279



SMB male crimp connector
For RG174/RG316 cable




A = 11.1 mm
B = 4.5 mm
C = 2.5 mm

8304

SMC male crimp connector
For RG174/RG316 cable

A = 11.1 mm
B = 4.5 mm
C = 2.5 mm

8304-2

Reverse SMC female crimp connector
For RG174/RG316 cable




A = 13.0 mm
B = 5.5 mm
C = 2.5 mm