

Cavity Filter Brackets

Cavity filter wall and rack mount brackets



Page 1 of 2



ZCG's range of cavity filters are suitable for either floor, wall or rack mounting. ZCG's range of filter mount brackets are customised for the diameter of the filter. Check below to find the suitable mount bracket.

Consult ZCG on your specific requirements if you cannot see a solution below.

| | SWB-CH-400 | SWB-CH-401 |
|----------------------------|---|---|
| Construction | Corrosion resistant aluminium and stainless steel worm drive clamp | |
| Clamp capability | Single cavity filter | Single cavity filter |
| Filter diameter capability | 203mm O.D. Suits ZCG Airband, FM and VHF filters | 140-150mm O.D. Suits ZCG UHF filters |
| Height | 400mm | 100mm |
| Mounting | 2 x 304 stainless steel worm drive clamps included | |
| Mounting requirements | Mount onto any supporting structure or wall using the mounting holes located in the bracket | |

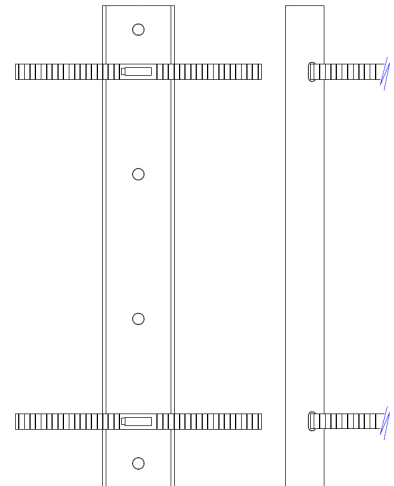

| | SWB-100-F | SWB-100-F2 |
|----------------------------|---|---|
| Construction | Corrosion resistant aluminium mount plate and tilt adjustable filter bracket | |
| Clamp capability | Single cavity filter | Single cavity filter |
| Filter diameter capability | 203mm O.D. Suits ZCG Airband, FM and VHF filters | 140-150mm O.D. Suits ZCG UHF filters |
| Mount plate dimensions | H: 50mm x W: 200mm with 2 x 8.5mm holes | |
| Mounting | Split ring clamp to secure filter. | |
| Mounting requirements | Mount onto any supporting structure or wall using the mounting holes located in the bracket | |



19" Rack mounting brackets on following page

Cavity Filter Brackets

Cavity filter wall and rack mount brackets

Page 2 of 2



| | A-2806 | A-2806-2 |
|----------------------------|---|---|
| Construction | Corrosion resistant aluminium and stainless steel worm drive clamp | |
| Clamp capability | 1-4 cavity filters | 1-2 cavity filters Requires 2 brackets |
| Filter diameter capability | 140-150mm O.D. Suits ZCG UHF filters | 203mm O.D. Suits ZCG Airband, FM and VHF filters |
| Height/ rack requirements | 7RU spacing maximum or 300mm | 19RU spacing maximum or 900mm |
| Mount plate dimensions | H: 60mm x W: 482mm with | |
| Filter mounting | 2 x 304 stainless steel worm drive clamps included | |
| Mounting requirements | Will fit into any 19" standard racking Models for 23" standard racking available consult ZCG | |




A-2806



A-2806

| | SRB-200-SS316 |
|-----------------------------|--|
| Construction | Welded 316 stainless steel mount bracket, 316 stainless steel worm drive and mounting hardware |
| Clamp capability | Single cavity filters or tube |
| Filter diameter capability | 50-200mm O.D. Suits ZCG VHF / Airband / FM cavity filters |
| Mount requirements | maximum 50mm diameter mount pole |
| Mounting dimensions | H: 60mm - 50mm pole x L: 226mm |
| Filter/tube mounting | 1 x 316 stainless steel worm drive clamp included |
| Installation tools required | 13mm or 1/2" spanner for U-bolt securing |

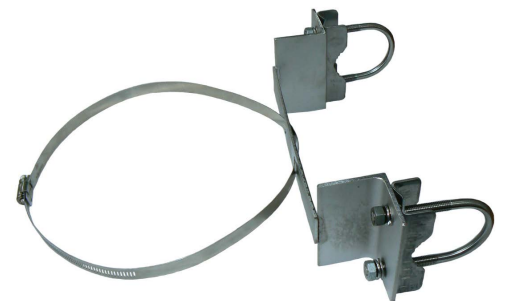

SRB-200-SS316