

Section 3 Section 3 Vehicle Mount 5



ZN4-77-06BLKR

All-black Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz



The ZN4-77-06BLKR ground independent UHF CB Radio antenna is a lightweight all-black finish antenna which delivers excellent performance and medium gain. The ZN4-77-06BLKR suits more medium to heavy-duty terrain, for light-medium duty applications see the ZN4-77-06SBLKR.

The ZN4-77-06BLKR is suitable for all radios on the market with a UHF female jack antenna connection.

Mounting hardware, connectors and other installation accessories are all available separately.

Construction	Black heatshrunk fibreglass whip, delrin and black finish feed base, black finish stainless steel 'barrel' spring base, threaded stud mount, external cable, termination and adaptor
Frequency range	477 MHz - UHF CB Radio
Bandwidth	476.4125 - 477.4125 MHz - all 40/80 channels
VSWR	<1.5:1
Tuning	Factory
Gain	6.6 dBi - suits mostly flat to mild hilly terrain
Maximum power	50 Watts
Impedance	50 Ohms
Polarisation	Vertical
H Plane	360° omnidirectional
Cable	4.5 metres RG58 low loss - bottom exit from sping base
Connector	FME female fitted to cable for ease of installation
Adaptor - supplied	FME male to UHF male PL259
Height	950mm
Weight	700grams
Mounting hardware order separate	Bullbar: BBM-SS, BBMXL-SS or BBKB-B Truck Mirror: MRM-SS Bracket Mounting: GM1, GM2, GM6
Mounting position recommended	As high on your vehicle/structure as possible using a minimum 13mm hole or appropriate bracket with a 13mm hole
Installation tools required	18mm spanner for split nut securing





FME male to UHF Male

PL259 adaptor

FME female jack

connector fitted to cable




Section 3 Section 3 Vehicle Mount 5




ZN4-77-06BLKR



All-black Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz

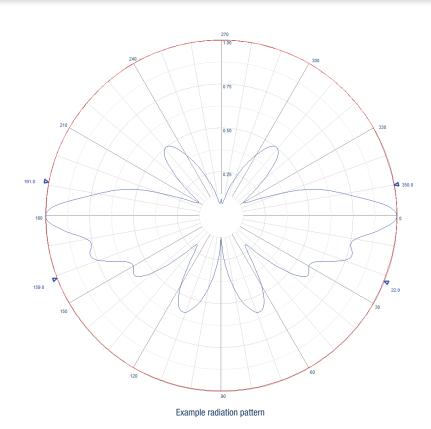

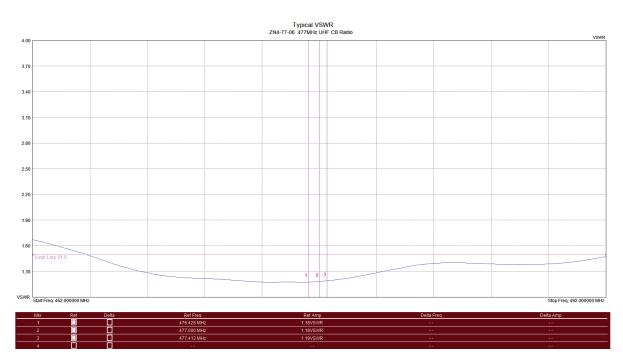

Typical VSWR





Section 3 Section 3 Vehicle Mount o



ZN4-77-06BLKR



All-black Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz

Recommended installation accessories



SKU: BBM-SS

Wrap around bull bar mount, up to 30-50mm diameter bull bar tube

16mm mount hole

Requires 10mm spanner



SKU: ATLM-B

Adjustable bonnet, boot and door jam mount. 360 rotational and 140 degree adjustment 16mm mount hole

Includes 5mm and 2mm allen keys



SKU: MRM-SS

304 stainless steel clamp style mirror mount 16mm mount hole Requires 10mm spanner



SKU: GM2

304 stainless steel 'Z' mount bracket 16mm mount hole



SKU: BBMXL-SS

Wrap around extra large bull bar mount, up to 76mm diameter bull bar tube

16mm mount hole

Requires 10mm spanner



SKU: BBKB-B

Knock-down antenna mount, powder coated black

16mm mount hole with 5.5mm cable hole



SKU: GM1

304 stainless steel 'L' mount bracket 16mm mount hole



SKU: A-6211

304 stainless steel offset mount bracket, 200mm offset 16mm mount slot




Section 3 Section 3 Vehicle Mount 5



ZN4-77-06BLKR

All-black Heavy-duty fibreglass whip and barrel spring base UHF CB Radio 477 MHz



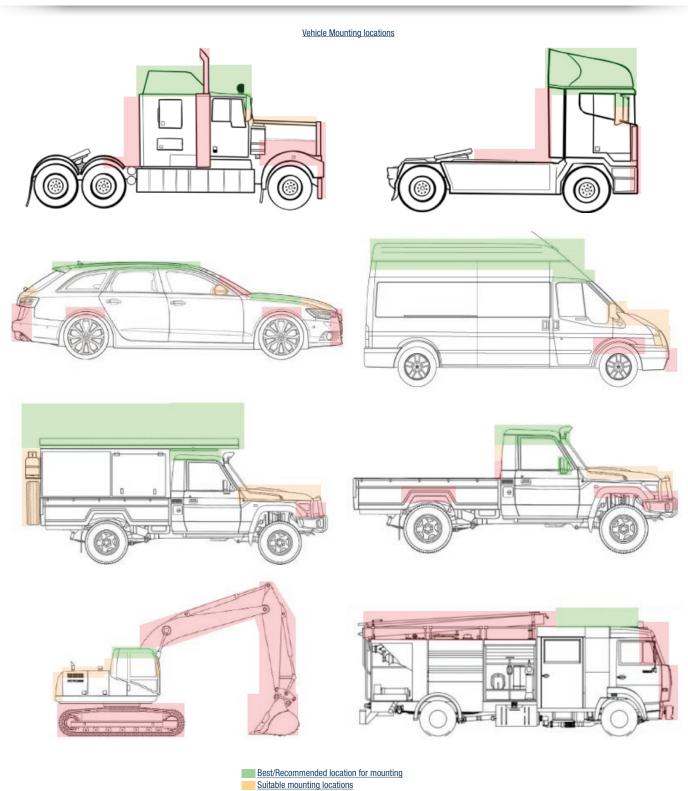



Not suitable mounting locations